


Chassis for 10/100M and 10/100/1000M Media Converter

This chassis is 2U 19inch with maximum 16slots for 10/100M and 10/100/1000M media converters.

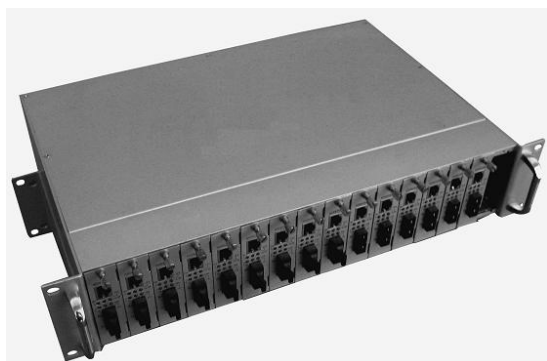

Model: HM-T100K

Product: chassis for 10/100M and 10/100/1000M Converter

CE, FCC, ROHS certified

MTBF: 50000hours

Specifications

Capacity	16slots for media converters,1 slot for management for option
Available converters	Both available for fast Ethernet converter and Gigabit Ethernet converter
10/100M Media Converter	Ports: SC default, RJ45 for 10/100M Ethernet port
	Indicators: PWR, FLINK, ELINK,100M, DUP
	Auto adapt 10/100M, full/half duplex, MDI/MDIX
10/100/1000M Media Converter	Ports: SC default, RJ45 for 10/100/1000M Ethernet port
	Indicators: PWR, FLINK, ELINK,1000M, 100M, DUP
	Auto adapt 10/100/1000M, full/half duplex, MDI/MDIX
Environment	AC and DC dual power redundancy with hot swappable
	Humidity: 10~90%, non-condensing
	Operation: 0~55℃
	Storage: -10~70℃

Typical Application

